

Recessed luminaires

Intara-Releda round



| | MBFL 50 W | MBFL 100 W | BBS 35 W | BBS 70 W | BBS 100 W | BBS 150 W | LED Standard | LED Food |
|------------------------------|---|------------|----------|----------|-----------|-----------|--------------|----------|
| Reflectors | | | | | | | | |
| Basic | _____ | | | | | | | |
| Spot | _____ | | | | | | | |
| Batwing | _____ | | | | | | | |
| WideWing | _____ | | | | | | | |
| MaxBeam | _____ | | | | | | | |
| Flood | _____ | | | | | | | |
| Wallwasher | _____ | | | | | | | |
| LED Basic | _____ | | | | | | • | • |
| LED Spot | _____ | | | | | | • | • |
| Reflector colours | | | | | | | | |
| Silver | _____ | | | | | | • | • |
| Nickel silver | _____ | | | | | | | |
| Optional accessories | | | | | | | | |
| Decorative cylinder | _____ | | | | | | | |
| Decorative disc | _____ | | | | | | | |
| LED ring | _____ | | | | | | • | |
| Luminaire description | | | | | | | | |
| | Recessed LED luminaire | | | | | | | |
| Technical details | | | | | | | | |
| | 2 x 15° pivot Service life: 40,000 h Efficiency: 86% Active cooling Ambient temperature: 35 °C Weight: 2.3 kg Ceiling cutout: Ø 188 mm Ceiling cutout with LED ring: Ø 200 mm Installation depth: 190 mm | | | | | | | |
| Further information | | | | | | | | |
| | BÄRO LED Food Light 3,350 K 51 W F 3,000 warm white 3,000 K 50 W F 4,000 cool white 4,000 K 50 W DL 3,000 warm white 3,000 K 35 W DL 4,000 cool white 4,000 K 32 W | | | | | | | |




Luminaire colours




Optional accessories

LED ring

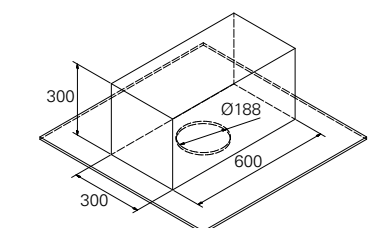

Minimum installation space
(ventilation space = 0.054 m³)

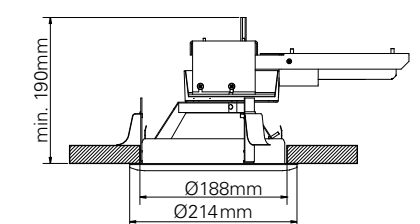

Product matrix

- Combination available
 - Particularly recommended
 - Mandatory order
- Luminaires with BBS lamps must always have a filter or shatter protection disc

Luminaire colours

- Strato silver
- Silver
- White
- Black
- RAL special colours
- Gold anodised
- Silver anodised / chrome
- Steel brushed / aluminium blank

Luminaire features

- IR No infrared rays
- UV No UV rays

Glass colours

- White RAL 9010
- Champagne RAL 9001
- Yellow RAL 1018
- Orange RAL 2009
- Red RAL 3020
- Blue RAL 5013

LED recess ring

- White
- Warm white
- Yellow
- Red
- Blue
- Green

Reflectors

-  Basic
-  Spot
-  Batwing 50°
-  Batwing 70°
-  Batwing 90°
-  WideWing
-  MaxBeam
-  Flood
-  Wallwasher
-  WallBeam
-  LED Basic
-  LED Spot
-  Power-Basic
-  Power-Batwing 50°
-  Power-MaxBeam